


INSULATED PIERCING CONNECTORS WITH SHEAR HEAD

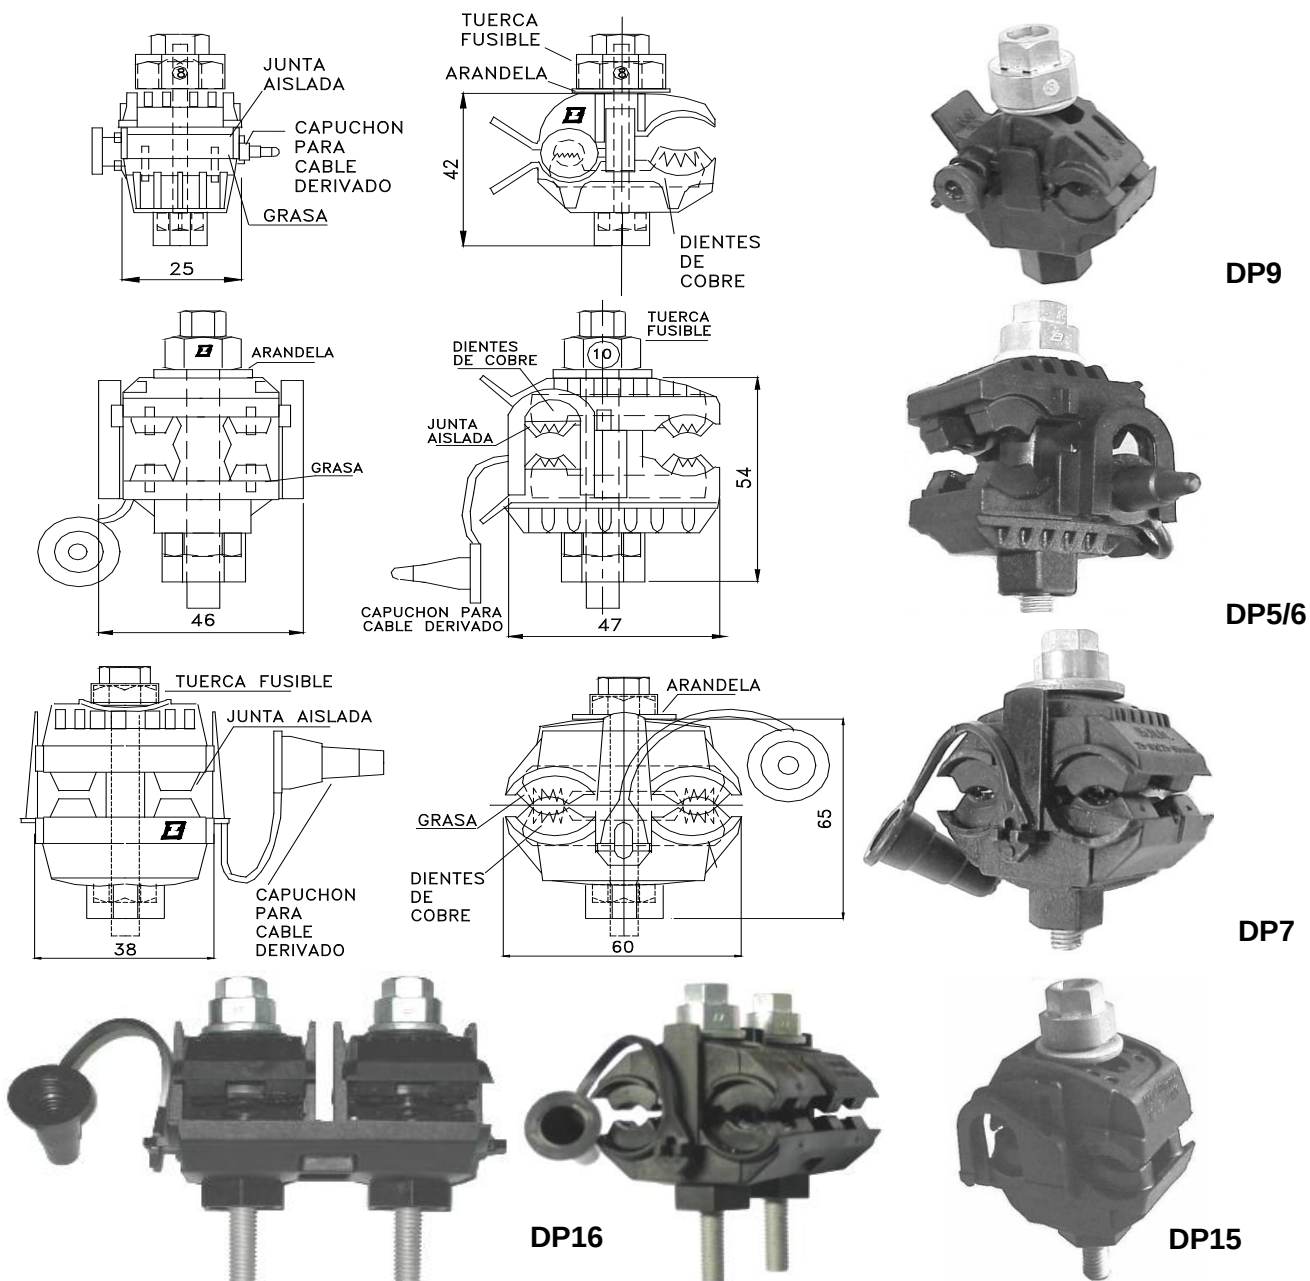

Model	Insulated Conductor mm ²		Insulated Conductor AWG		Principal use	Torque kg.m
	Main	Tap	Main	Tap		
DP9	10 to 120	1,5 to 10	# 7 to 4/0	# 16 to 7	street lighting	0,8
DP5/6	16 to 95	4 to 35	# 5 to 4/0	# 12 to 2	service drop	1,0
DP5/6A	16 to 95	4 to 16	# 5 to 4/0	# 12 to 6	service drop	1,0
DP7	16 to 150	16 to 120	# 5 to 300	# 5 to 4/0	jumpers line to line	1,5
DP15	50 to 150	4 to 35	#1/0 to 300	# 12 to 2	service drop	1,0
DP15A	50 to 150	4 to 16	#1/0 to 300	# 12 to 6	service drop	1,0
DP16	35 to 185	35 to 150	#2 to 350	#2 to 300	jumpers line to line	1,8

■ If requested tin-plated copper teeth can be manufactured,
 models: **DP9E, DP5/6E, DP7E, DP15E y DP16E**