


ISOLATED CONNECTOR WITH SHEAR HEAD, FOR CONNECTION FROM NEUTRAL MESSENGER TO CONCENTRIC CABLE NEUTRAL ("ANTI-THEFT CONNECTION")



Model	Insulated Conductor section		Torque kg.m	Weight gr
	Neutral messenger	Concentric		
	mm²			
DP10	50 a 70	4/4 a 6/6	1,0	115
	AWG			
	# 1/0 to 2/0	# 12+2 to 7+7		

- Direct crimping over the insulated bunched cable neutral, surface contact over the service drop concentric cable neutral.
- The insulated bunched cable line watertight connection eliminates galvanic corrosion problems.
- Adjustment by means of shear nut tightening, manufactured under strict torque and sizes tolerances measurements.
- Easy installation with unequal results.

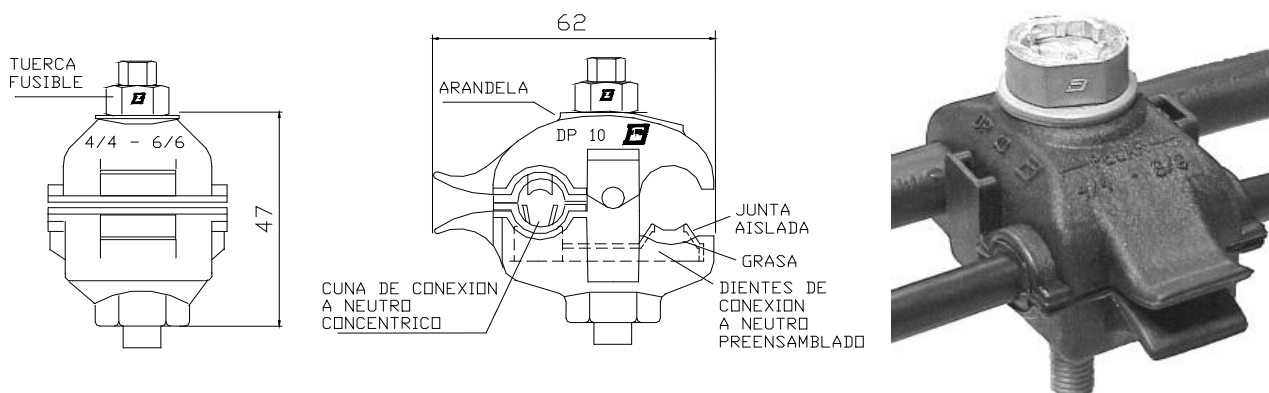

SERVICE DROP
WITH CONCENTRIC CABLE