



AERIAL FUSEHOLDER, UP TO 63 A

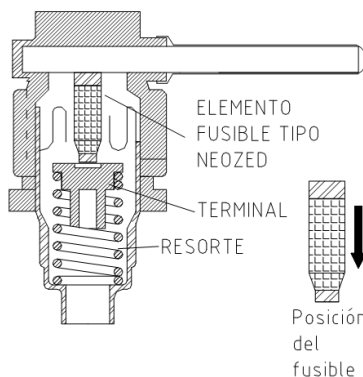

- Insulated, tinned copper line contact (arm).
- Stainless steel spring.
- Thermoplastic body and cover with UV protection.

Model	Conductor section		Weight gr
	branching	concentric	
	mm²		
DP8	4 to 16	4/4 to 16/16	60
	# AWG		
	12 to 6	12+12 to 6+6	

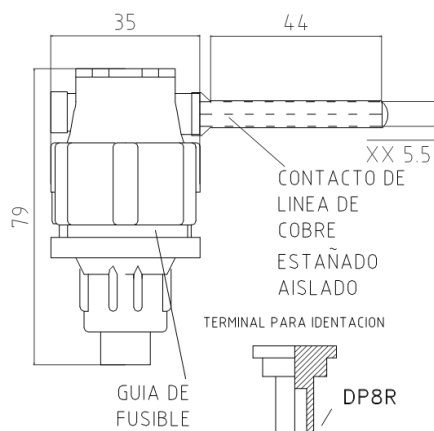

NEOZED FUSES (DIN 49.522 - VDE 0636 - IEC 60269)

Model	Current	Type	Ø	Lenght	Nominal Voltage	Max. Voltage
FN06	6A	D01	11,0	36,0	380 V	420 V
FN10	10 A					
FN20	20 A	D02	15,3			
FN25	25 A					
FN35	35 A					
FN50	50 A					
FN63	63 A					