


ISOLATED PIERCING CONNECTOR WITH FUSEHOLDER

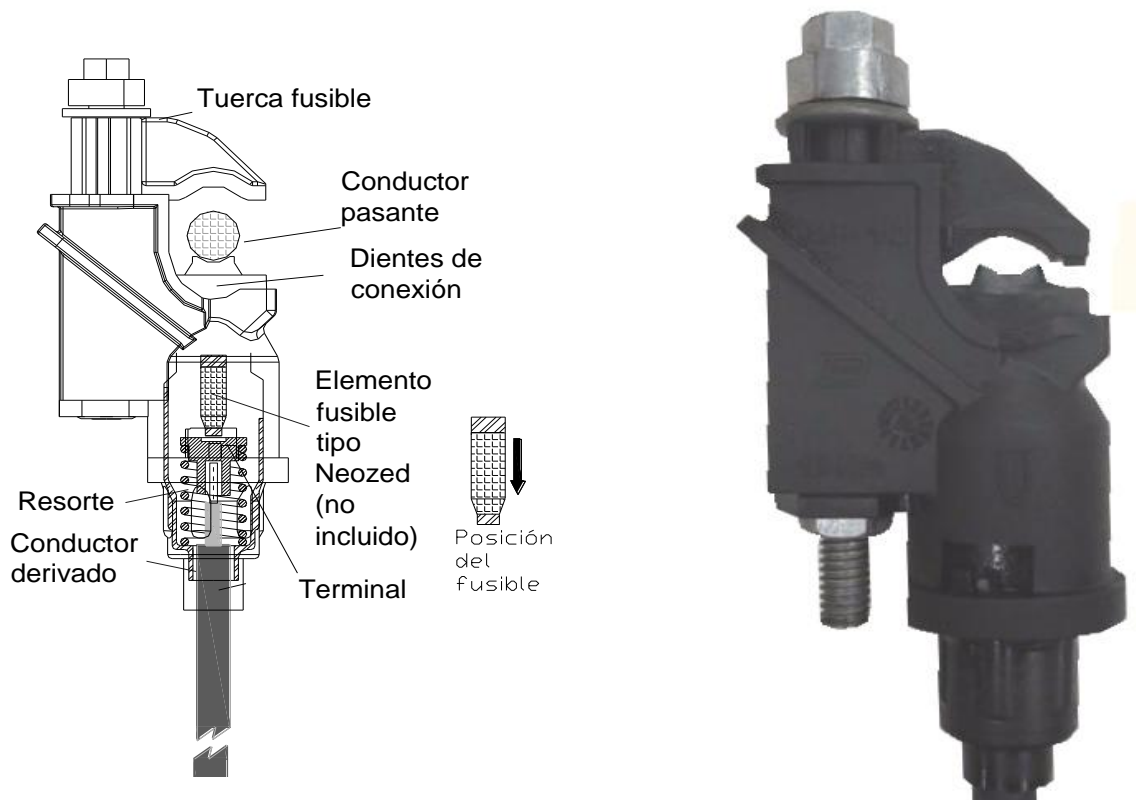

Model	Main Conductor	Tap Conductor		Torque kg.m	Weight gr
		ABC	Concentric		
	mm²				
DP12	16 a 95	4 to 16	4/4 to 16/16	0,8	155
	AWG				
	6 a 4/0	# 12 to 6	# 12+12 to 6+6		

MAIN ADVANTAGES

- After many years of well proven in service performance, the excellent features and capabilities of both our **DP5/6** service drop connectors and **DP8** encapsulated fuse holder, are met in just one element.
- Insulation piercing connection by means of tinned copper teeth which low resistivity (60% less than aluminum), makes it the ideal choice for the described purpose.
- Its insulated bunched cable line watertight contact eliminates galvanic corrosion problems.
- Adjustment by means of shear nut tightening, manufactured under strict torque and sizes tolerances measurements.
- Thermoplastic body and cover manufacture with UV protection.
- Suitable for Neozed fuses up to 63 Amps.