


ISOLATED PIERCING CONNECTOR WITH FUSEHOLDER

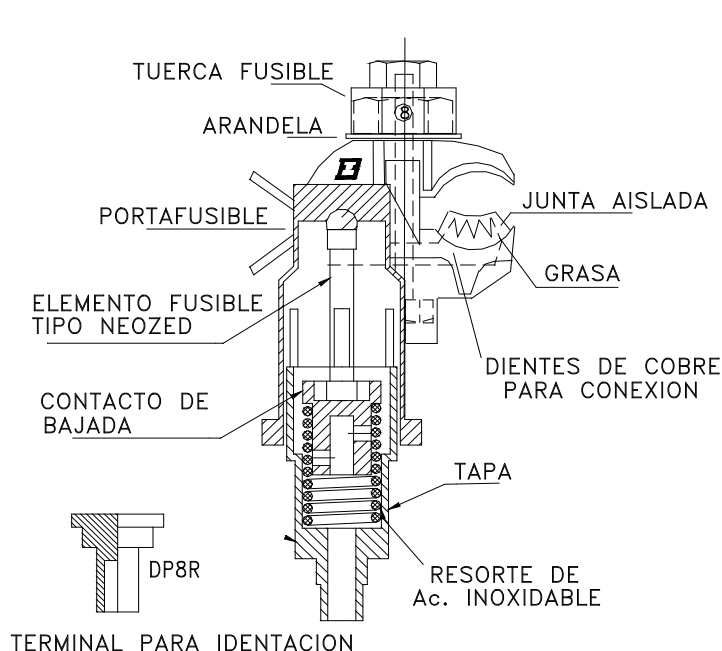

Model	Main conductor		Tap conductor		Torque kg.m	Weight gr
			mm²	AWG		
	mm²	AWG	ABC			
DP12/1	10 a 95	8 A 4/0	4 a 16	4 a 16	0,8	115
			Concentric			
			4/4 a 16/16	4/4 a 16/16		

MAIN ADVANTAJES

- 360° fully swivel tightening position, comprises the well proven excellent features and capabilities of both our **DP9** service drop connectors and **DP8** encapsulated fuse holder.
- Insulation piercing connection by means of tinned copper teeth which low resistivity (60% less than aluminum), makes it the ideal choice for the described purpose.
- Its insulated bunched cable line watertight contact eliminates galvanic corrosion problems.
- Adjustment by means of shear nut tightening, manufactured under strict torque and sizes tolerances measurements.
- Thermoplastic body and cover manufacture with UV protection.
- Suitable for NeoZed fuses up to 63 Amps.